



MINERAL RANGE & LAKE MICHIGAN R.R.

POTTER PALMER,
LAKE FOREST, ILL.
HO GAUGE
SCALE OF DWG. 3/4" = 1'
SQUARES = 12'

SYMBOLS & STANDARDS

- CURVATURE:**
- POINT OF CHANGE OF CURVATURE
 - RAILHEAD ELEVATION ABOVE FLOOR DATUM, INCHES
 - RADIUS, INCHES
 - MIN. RADIUS
 - MAIN TRACKS
 - OUTER CURVES ON END LOOPS
 - UNMARKED CURVES ARE 36" RADIUS
 - DIESEL SERVICE, LAYOVER, SWITCH-LEAD, WIRE TRKS., INDUSTRY LOAD/EMPTY EXCHANGE, ETC.
 - TURNOUTS:
 - STRAIGHT (STRAIGHT FROG)
 - SPECIAL (CURVED)
 - FROG NO. & RADI AS MARKED
 - VERTICAL SEPARATION
 - "SHORT" CROSSINGS: MIN. (RAILHEAD TO RAILHEAD) = 3' (EASEONE FEET)
 - "LONG" CROSSINGS: MIN. ≈ 4 1/2'
 - ISHCANABA PSGR. STA.
- VIEWPOINTS (LINE OF SIGHT):**
- REFERENCE, NON-TRACK ELEVATIONS
 - WATER SURFACE, OBSTRUCTIONS, ETC.
 - "PEEPHOLE"
 - VIEWPOINTS
- TURNOUTS:**
- 36
 - 32
 - 30
 - 24
 - 18
 - 12
 - 6
 - 3
 - Y3
 - WYE - ANGLE AS MARKED

M.R. & L.M.R.R.
CONNECTIONS

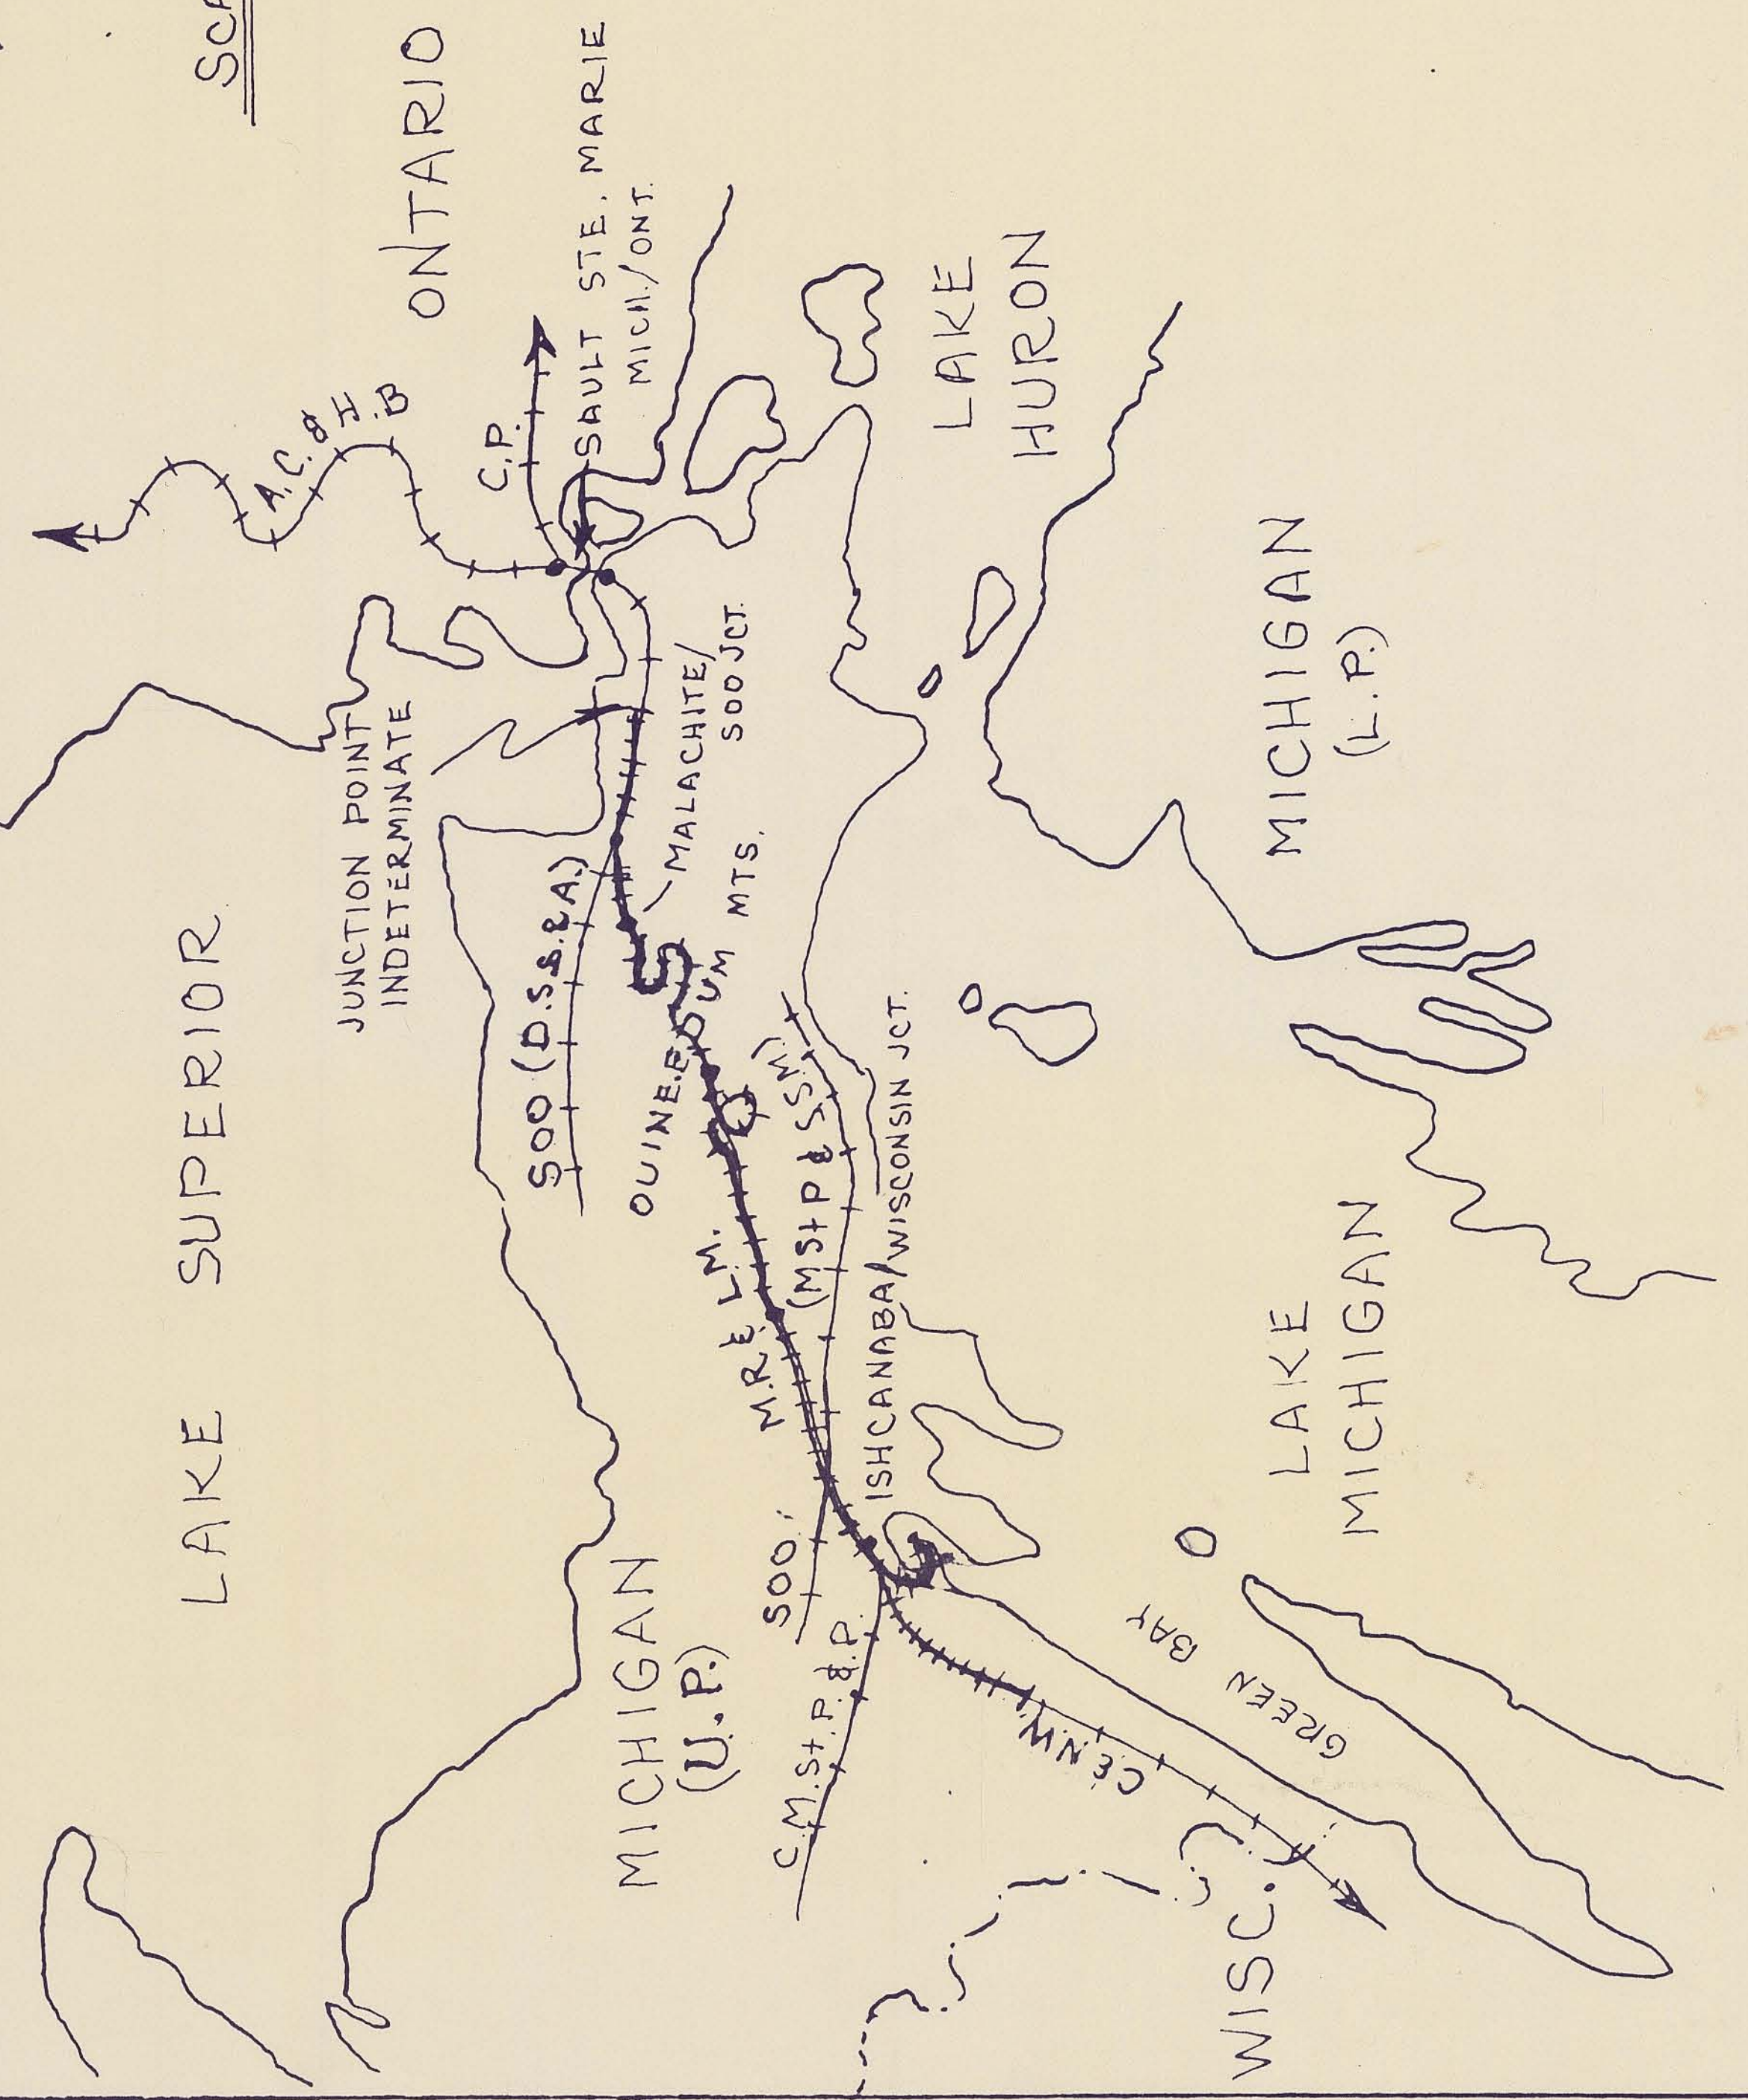

DEVELOPED BY:
JOHN H. ARMSTRONG,
10204 SOUTHWOOD DRIVE,
SILVER SPRING, MD 20901
COMMERCIAL PUBLICATION RIGHTS RESERVED